
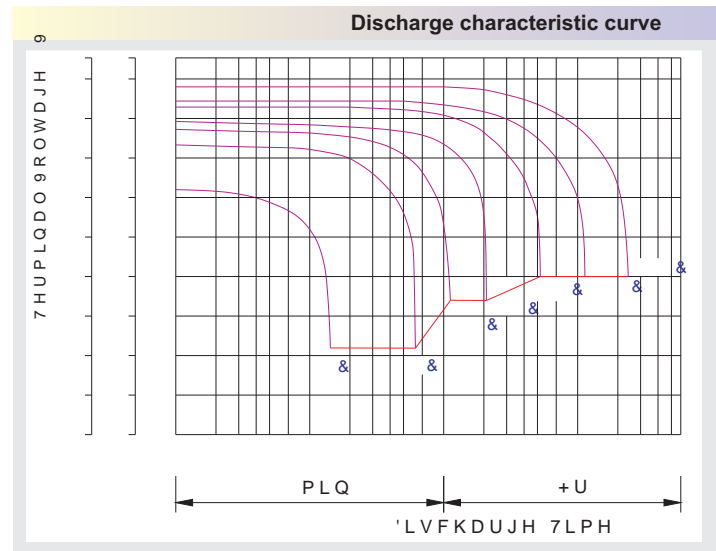
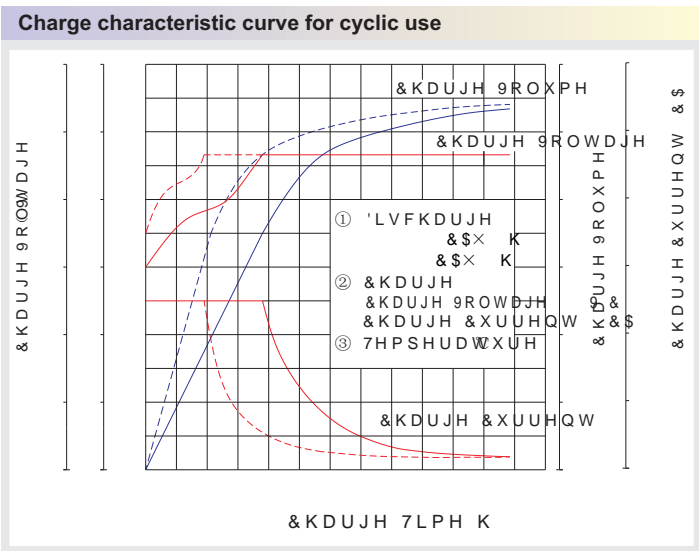
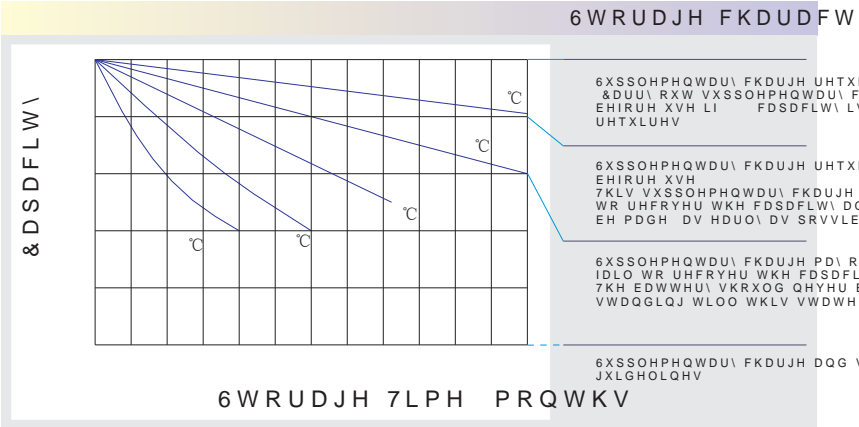


DG2-1000

9

\$K

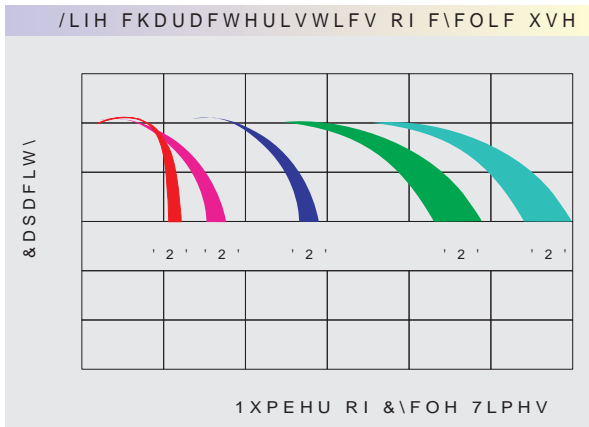

Capacity Factors With Different Temperature

| Battery Type | | -20°C | -10°C | 0°C | 5°C | 10°C | 20°C | 25°C | 30°C | 40°C | 45°C |
|--------------|--------|-------|-------|-----|-----|------|------|------|------|------|------|
| GEL Battery | 6V&12V | 50% | 70% | 83% | 85% | 90% | 98% | 100% | 102% | 104% | 105% |
| | 2V | 60% | 75% | 85% | 88% | 92% | 99% | 100% | 103% | 105% | 106% |
| AGM Battery | 6V&12V | 46% | 66% | 76% | 83% | 90% | 98% | 100% | 103% | 107% | 109% |
| | 2V | 55% | 70% | 80% | 85% | 92% | 99% | 100% | 104% | 108% | 110% |

Discharge Current VS. Discharge Voltage

| | | |
|---------------------------------|------------|-------------|
|)LQDO 'LVFKDUJH 9 ROWDJH 9 FHOO | 9 | 9 |
| 'LVFKDUJH &XUUHQW \$ (\$) ≤ & | & < (\$) < | & (\$) ≥ & |

Charge the batteries at least once every six months, if they are stored at 25°C.

&KDUJLQJ 0HWKRG

| | |
|---|--|
| &RQVWDQW 9ROWDJH 9 FHOO[K 0D[&XUUHQW (IIFW RI WHPSHUDWXUH RQ IOR&KDUJH YR | |
| &RQVWDQW &XUUHQW &x K | |
|)DVW &[K &[K | |

| | | | |
|-----------------|-----------------------|------------------|-----------------------|
| Bolt | 0 | 0 | 0 |
| Terminal | F3 F4 F13 F18 T25 T26 | F8 F11 F12-1 F15 | F5 F9 F10 F12 F14 F16 |
| Torque | 6~7N·m | 8~10N·m | 10~12N·m |

Maintenance & Cautions

| |
|---|
| Cycle service |
| ※ \$YRLG EDWWHU\ RYHU GLVFKDUJH HVSHFLD |
| ※ &KDUJHG ZLWK UHFRPPHQG YROWDJH HQVKU |
| ,Q JHQHUDO UHF&KDUJH FDSDFLW\ VKRXOG |
| ※ (IIFW RI WHPSHUDWXUH RQ IOR&KDUJH YR |
| ※ 7KHUH DUH D QXPEHU RI IDFWRUV WKDW ZLOO |
| 7KH PRVW VLJQLILFDQW DUH GHSWK RI GLV |
| GLVFKDUJH UDWH DQG WKH PDQQHU LQ ZK |
| *HQHUDOO\ VSHFNLQJ WKH PRVW LPSRUWD |