

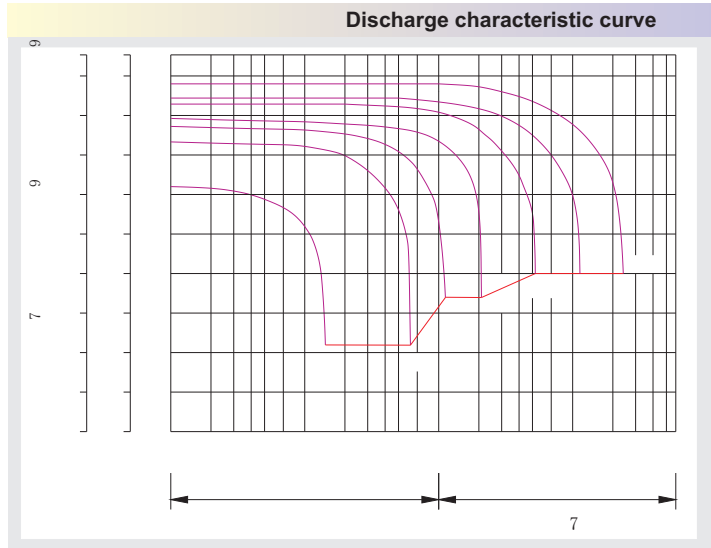
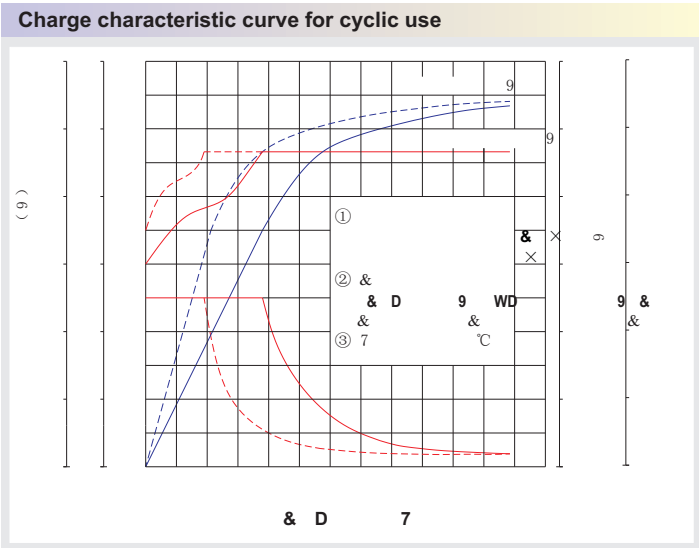


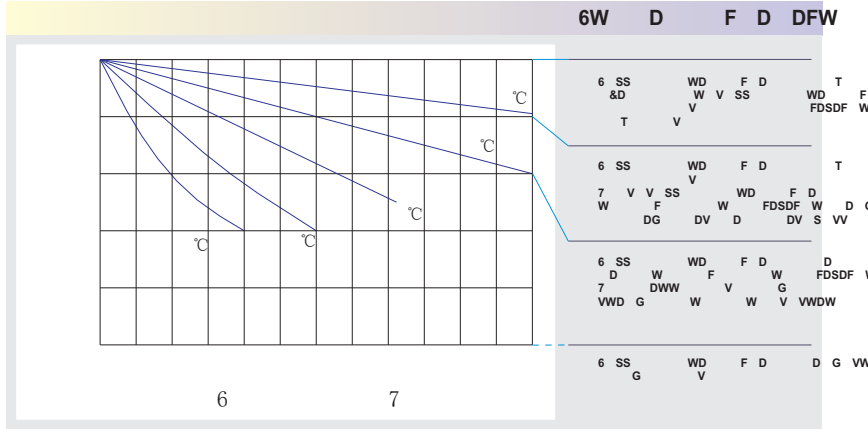

# DG2-1200

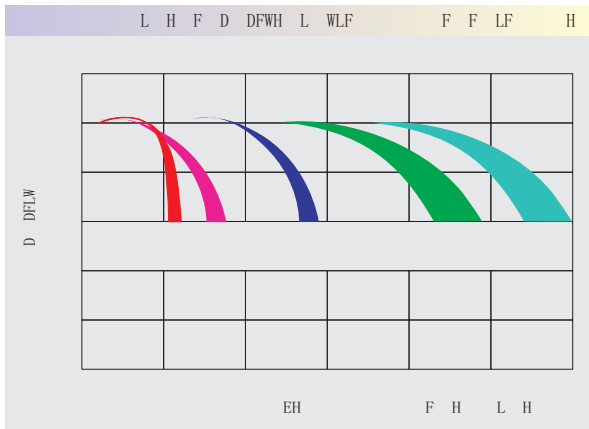

## Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	6V&12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM Battery	6V&12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

## Discharge Current VS. Discharge Voltage

9	9	9	9	9
	( ) ≤	< ( ) <	( ) ≥	

Charge the batteries at least once every six months, if they are stored at 25°C.

& D 0 W G

& VWD W 9	WD	9
& VWD W &	W	x
D W		

Bolt	0	0	0
Terminal	F3 F4 F13 F18 T25 T26	F8 F11 F12-1 F15	F5 F9 F10 F12 F14 F16
Torque	6~7N·m	8~10N·m	10~12N·m

## Maintenance & Cautions

Cycle service	
※	
※	
0※	FW W S DW °C DW F D
※ 7	
7	



Distribuidor en el Perú

Calle Porcel N°214, Urb. María Isabel, Arequipa - Arequipa | Perú  
Tel.: (054) 507474 | RPC 987090104 | RPM #958343859

E-mail: [administracion@energiainnovadora.com](mailto:administracion@energiainnovadora.com) | [www.energiainnovadora.com](http://www.energiainnovadora.com)