

OPzV2-1000


2V1000Ah



Effect of temperature on long term float life




Life characteristics of cyclic use

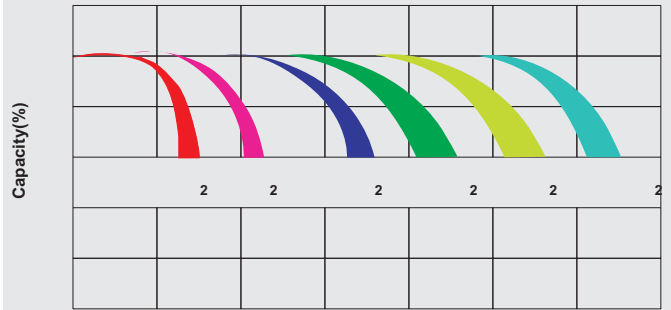


1 PEHU RI & FOH LPHV

Charge characteristic Curve for cyclic use

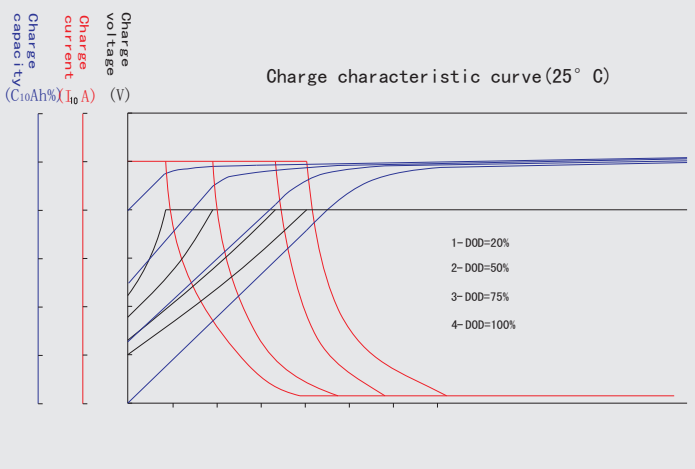

Discharge characteristic Curve

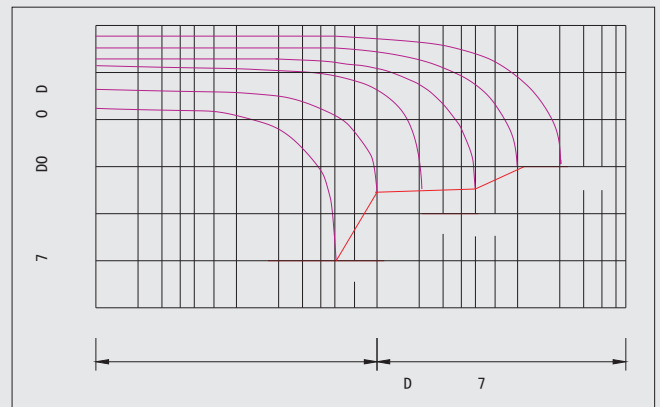

		/R	WLPH	LVF	DU	H	FSDFLW	IRU	VRODU	ZL	DSSOLFDWLR
		&DSDFLW	&	()	()	()	()	()	()	()	()
OR	HO										
23	9										

											23	9
7												

Discharge Current VS. Final Voltage

		()	(9)
≤0.1	10	1.90	
0.1	10< ≤ 10	1.85	
10<	≤4 10	1.80	
10<	≤6 10	1.75	
10<	≤10 10	1.70	
>15	10	1.60	

Charge the batteries at least once every one year, if they are stored at 25°C.

& DU L OHW R

		x
--	--	---

Maintenance & Cautions

)ORDW 6HU LFH	
※ (
※ (
(
0	
※ (°C
※ 6	



Distribuidor en el Perú

Calle Porcel N°214, Urb. María Isabel, Arequipa - Arequipa | Perú

Tel.: (054) 507474 | RPC 987090104 | RPM #958343859

E-mail: administracion@energiainnovadora.com | .energiainnovadora.com