



Optolite Prime®

Description

Optolight Prime floodlights from Magnatech LED are an ideal alternative to halogen, sodium and metal halide floodlights.

The stylish, slim and lightweight design is IP65 rated and ideal for both indoor and outdoor use.

Power rating ranges from 60W to 180 watts offering considerable energy saving compared to their conventional counterparts and with a life expectancy in excess of 35,000 hours are practically maintenance free.

With a simple-to-change lens the Optolite Prime is available with beam angles of 15°, 25°, 40°, 60° and 120° this allowing for a variety of applications from advertising boards and hi-bay lighting to tunnel lighting and car parks.

As with all Magnatech LED lighting products, the lamps emit no UV light, contain no harmful metals such as mercury and are more than 95% recyclable.



Avantages

- Suitable for high-risk locations (gas stations)
- Resistent to shocks and vibrations
- To be to 80% energy saving
- Ideal to replace HPS and Metal Halide Lamps

Applications

- Large Indoor Areas
- Industrial Areas
- Outdoors



⊕ (€ RoHS 🕱 🛊 🝪 🙆









Calle Porcel N°214, Urb. María Isabel, Areguipa - Areguipa | Perú Tel.: (054) 507474 | RPC 987090104 | RPM #958343859


E-mail: ventas@energiainnovadora.com | www.energiainnovadora.com









Specifications Techniques

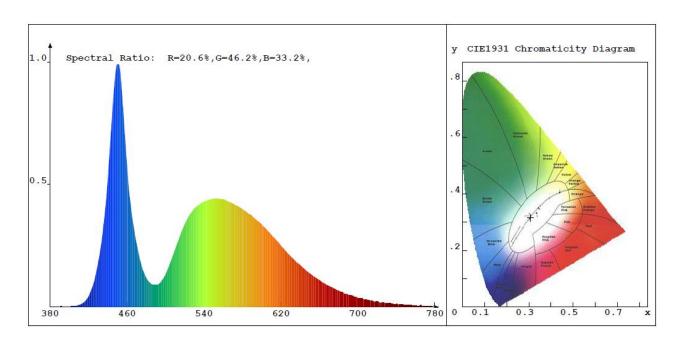



Optolite Prime-180W



Power	Light Output	Angle	CRI	IP	Voltage	Color
60W	6600Lm ±10%	120°	>70	IP65	85-265V	All
90W	9900Lm ±10%	120°	>70	IP65	85-265V	All
120W	13200Lm ±10%	120°	>70	IP65	85-265V	All
180W	19800Lm ±10%	120°	>70	IP65	85-265V	All

Calle Porcel N°214, Urb. María Isabel, Arequipa - Arequipa | Perú Tel.: (054) 507474 | RPC 987090104 | RPM #958343859

E-mail: ventas@energiainnovadora.com | www.energiainnovadora.com