



Life characteristics of cyclic use

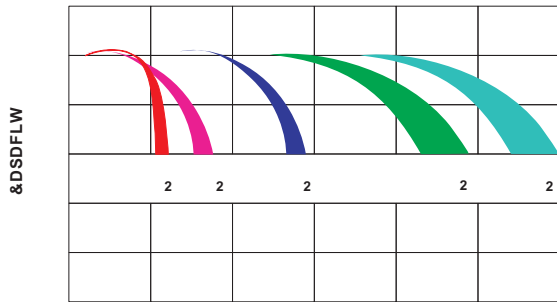


1 PEHU RI & FOH 7LPHV


Storage characteristic

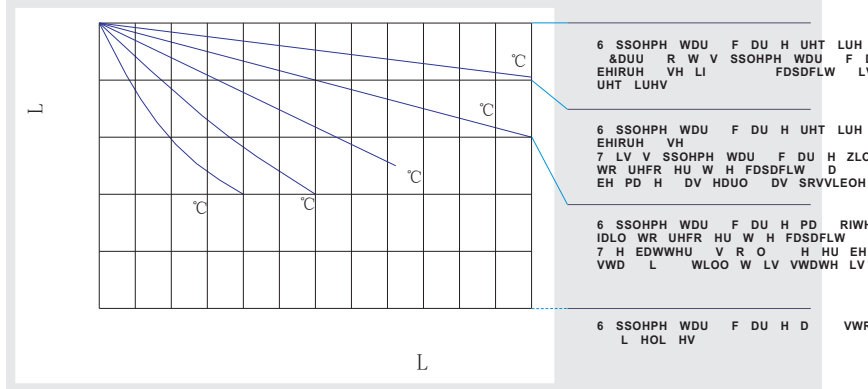

Charge characteristic curve for cyclic use

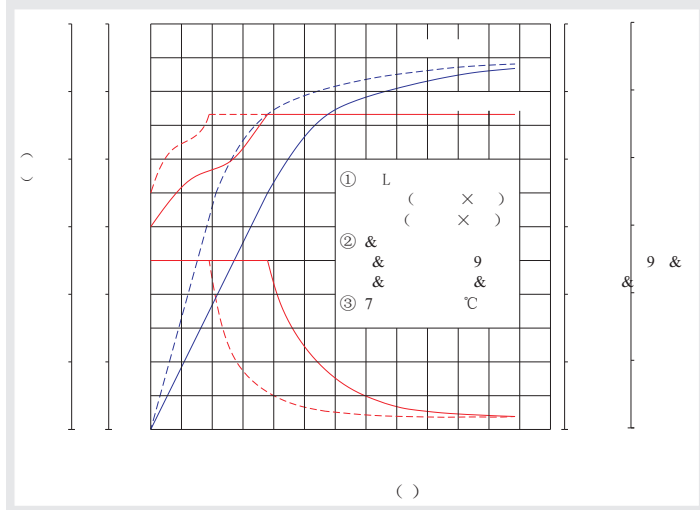

Discharge characteristic curve

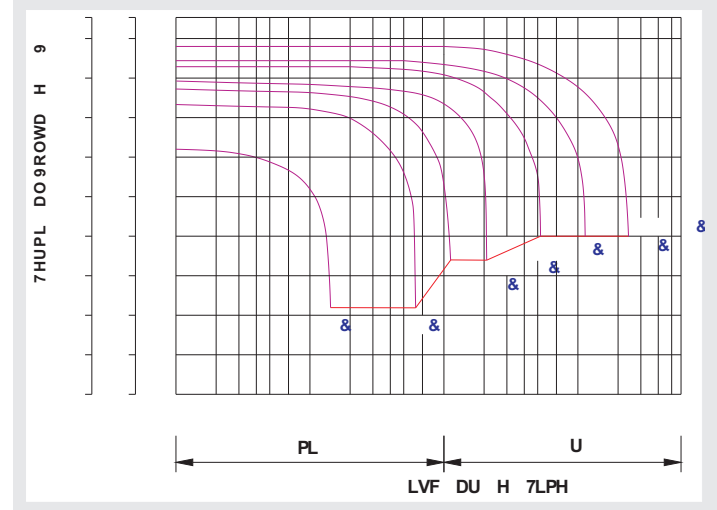

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	6V&12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM Battery	6V&12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

Discharge Current VS. Discharge Voltage



Charge the batteries at least once every six months, if they are stored at 25°C.

& DU L 0HW R

	&	9 FHOO
&R VWD W & UUH W & x &		
	&	&

Bolt	0	0	0
Terminal	F3 F4 F13 F18 T25 T26	F8 F11 F12-1 F15	F5 F9 F10 F12 F14 F16
Torque	6-7N-m	8-10N-m	10-12N-m

Maintenance & Cautions

Cycle service	
※	RLG EDWWHU R HU GLVFKDU H HVSHFLDOO
※	KDU HG ZLWK UHFRPPH G ROWD H H V UH EDV
	, H HUDO UHFKDU H FDSDFW VKR OG EH
※	(IIFW UH WHPSHUW UH R F FOH EKDU H ROWD
※	7KHUH DUH D PEHU RI IDFWRUV WKDW ZLOO DIIHF
	7KH PRVW VL LILFD W DUH GHSWK RI GLVFKDU H
	GLVFKDU H UDWH D G WKH PD HU L ZKLFK W
	H HUDOO VSHFNL WKH PRVW LPSRUWD W ID



Distribuidor en el Perú